
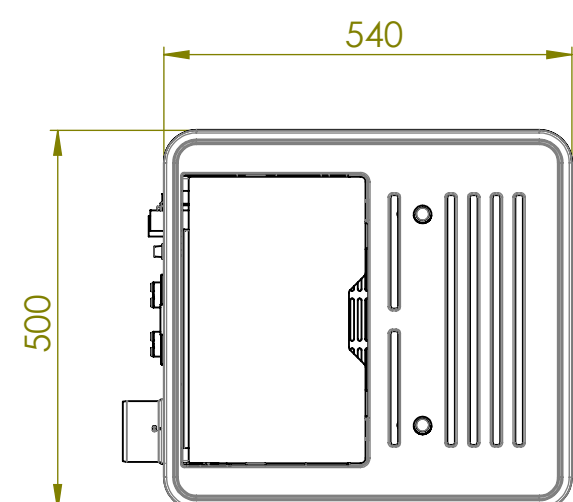
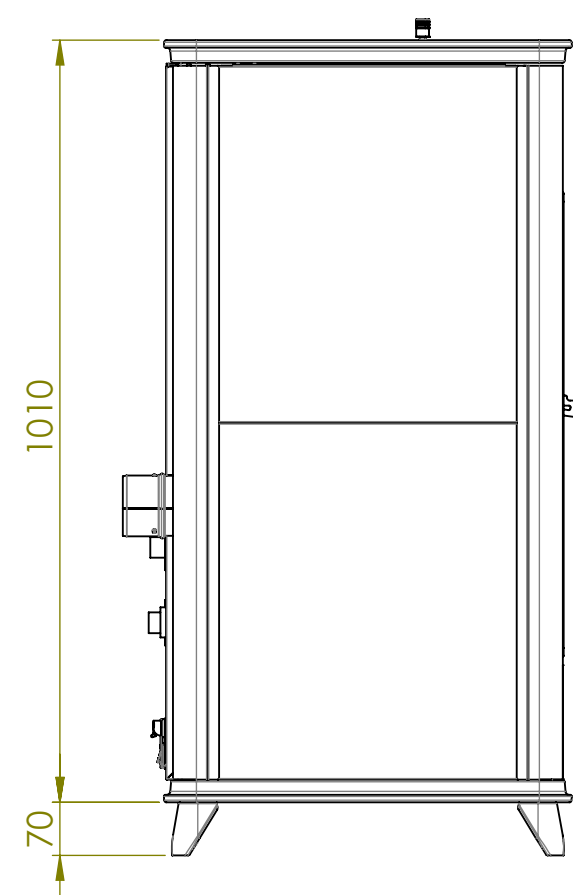


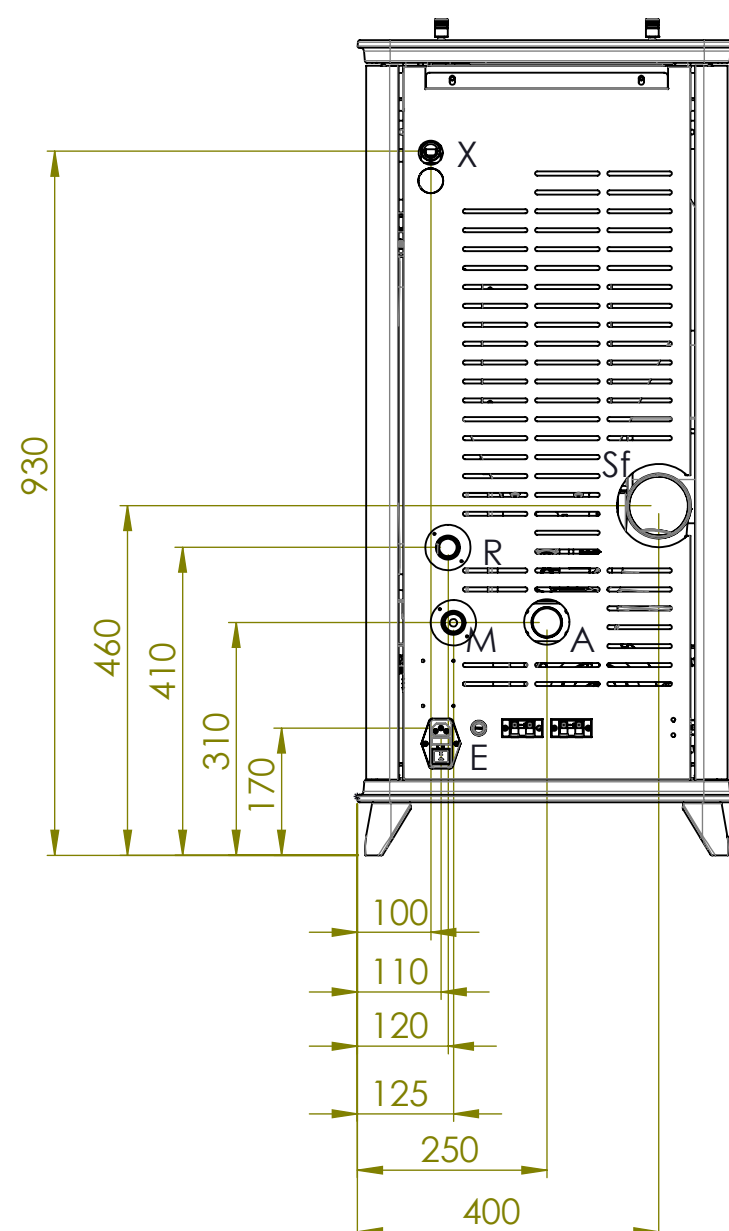

A= 40 mm buitenluchtaansluiting
40 mm outside air connection
40 mm externer Luftanschluss
40 mm connexion d'air externe

M= 3/4" retour
3/4" return
3/4" zurück
3/4" retour

R= 3/4" aanvoer
3/4" supply
3/4" Vorlauf
3/4" Entree

Sf= ø 80 mm rookgasafvoer
ø 80 mm flue gas outlet
ø 80 mm Abgasaustritt
ø 80 mm sortie des gaz de combustion

X= 1/2"
Overdrukbeveiliging
Pressure relief
Überdrucksicherung
protection contre la surpression


NORDIC FIRE

		CODICE HRV	Revisione 0
DESCRIZIONE HRV Torsby			
GRADO DI TOLLERANZA 	Peso kg 160.49	SVILUPPO -	MATERIALE -
secondo norme UNI ISO 22768/1 DATA DI CREAZIONE 16/09/2019	2° REVISIONE	3° REVISIONE	4° REVISIONE ULTIMA REVISIONE QUANTITA' - per prodotto